

# **Thermal Gradients, Collection and Mortality at the McNary Project, 2014**

Water temperatures and the effect on  
salmonids

This report is prepared for the Army Corp of  
Engineers, Walla Walla District




**Rosanna L. Mensik**

**October, 2014**

**Pacific States Marine Fisheries Commission**

**P.O. Box 428**

**Umatilla, OR. 97882**

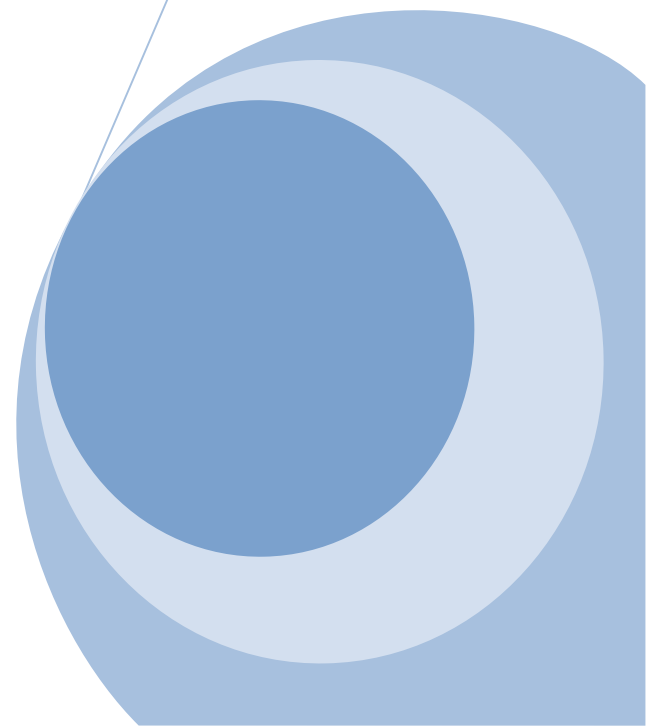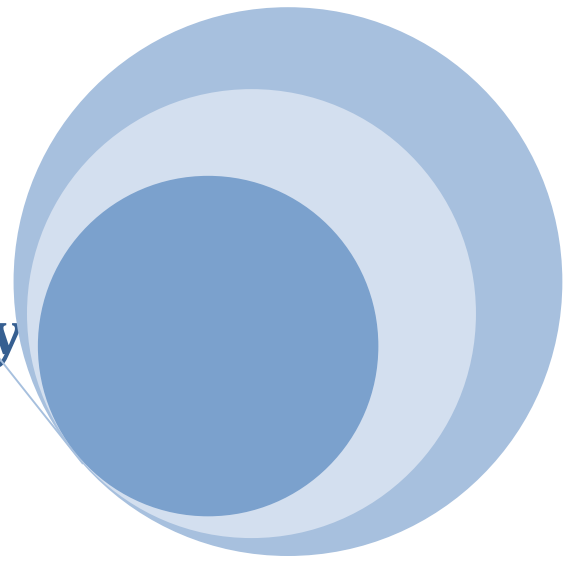

## Executive Summary

Water temperatures at the McNary Project are influenced by air temperature and wind velocity. Project operations (turbine unit operations, number and location of operating and non-operating turbine units) and spill (magnitude and more importantly percent) have an effect on the movements and creation of thermal gradients. Total project discharge during the temperature monitoring period (June 15 – August 31) averaged 206.7kcfs in 2014. The percentage of project discharge diverted through the spill June 15 – August 31, 2014 was 49.9%. The Fish Operation Plan mandates that there will be 40% flow from April 10 until June 15. June 16 through August 31, 50% of the flow will go to spill. The Fish Operation Plan is agreed upon by the fish managers who use the current Biological Opinion as reference.

McNary Dam had weather that was average, cooler than 2013. Historically, there have been gradients that occur at the southern end of the powerhouse during days with elevated air temperatures and light winds. In the 2014 season, McNary Dam saw the worst gradients on June 30. There were differences between the forebay and the gatewell of 8.6°F, 5:00 p.m. at Unit 8.

Fish passage timing can be critical to the mortality equation but earlier passage does not necessarily correspond to cooler river temperatures and decreased mortality. The forebay was consistently reaching 70°F by July 15, at which time the Corp of Engineers initiated a “sawtooth” pattern for operation of the powerhouse. This is an every-other-unit pattern which allows for a larger volume of cooler water to be drawn into the system. By July 8, 50% of the Hanford Reach Fall Chinook fish were at McNary. Without collection in the raceways for transport the volume of mortalities cannot be accounted for. Therefore, the only indicator of mortality is from the sample holding tanks. The largest day of mortality, 5.8%, was June 24. June 23 saw differentials between the forebay and gatewell as large as 6.3°F.

When the facility is in bypass operations and fish are being sampled every-other-day, the only reliable accounting is from the sample holding tank. From June 15 through August 31, sample tank mortality was 1.3%, 201 of 14,950 fish sampled. System mortality was 0.03%, 661 for the 2,306,267 fish estimated for passage.

## Table of Contents

EXECUTIVE SUMMARY	2
ACKNOWLEDGMENTS	4
INTRODUCTION	5
OBJECTIVES	5
METHODS	6
WEATHER	8
PROJECT DISCHARGE & SPILL	10
THERMAL PROFILES AT THE POWERHOUSE	11
FOREBAY & GATEWELL TEMPERATURE PROFILES	13
EFFECTS OF FOREBAY WATER TEMPERATURES ON PROJECT TEMPERATURES AND THERMAL GRADIENTS	16
COLLECTION CHANNEL	18
TEMPERATURE GRADIENTS AT THE ORIFICE DISCHARGE	20
JUVENILE FISH FACILITY	22
COLLECTION CHANNEL VS. SEPARATOR	22
SEPARATOR VS. RACEWAY	22
TAILRACE	23
HOLDING FOR TRANSPORT	24
RIVER TEMPERATURE AND FISH PASSAGE TIMING	24
FISH CONDITION	25
PASSAGE	25
MORTALITY	26
RECOMMENDATIONS	27
POWERHOUSE OPERATIONS	27
LITERATURE CITED	28

### List of Figures

Figure 1. Placement of temperature data devices at McNary Dam, 2014* .....	7
Figure 2. Differences in degrees Fahrenheit between forebay & gatewell, with wind, at McNary Dam, July 21 – 27, 2014 .....	8
Figure 3. Air temperatures (°F) & wind velocity (mph) at McNary Dam, June 15 – August 31, 2014.....	9
Figure 4. Project discharge for McNary Dam, 2010 - 2014 .....	11
Figure 5. Percent spill at McNary Dam, 2010 – 2014 .....	11
Figure 6. Forebay temperatures at McNary Dam, June 22, 2014.....	12
Figure 7. Temperature differences, in degrees Fahrenheit, in 5 gatewells across the McNary powerhouse, July 26 – August 1, 2014* .....	12
Figure 8. McNary Dam forebay temperatures in degrees Fahrenheit, June 15 – Aug. 31, 2014	14
Figure 9. An average of temperatures across all 14 turbine Units at McNary Dam, July 26 - August 1, 2014 .....	15
Figure 10. Forebay & Gatewell Temperatures at Unit 1 at McNary Dam, from July 28 - 29, 2014 .....	15
Figure 11. Average Gatewell & Forebay temperatures at McNary Dam, June 15 – August 31, 2014.....	17

Figure 12. Average collection channel temperatures at McNary Dam, 2010- 2014 .....	18
Figure 13. McNary Dam collection channel temperatures, August 15 - 21, 2014 .....	19
Figure 14. Differences in temperatures between Unit 1 and Unit 12 in the collection channel at McNary Dam, June 25 – August 31, 2014.....	19
Figure 15. Differences in temperatures between Unit 1 and Unit 12 in the collection channel at McNary Dam, 2013 vs. 2014.....	20
Figure 16. McNary Dam gatewell & collection channel temperatures at turbine Unit 12, July 13 – 20, 2014.....	20
Figure 17. Temperature differentials between gatewell & collection channel at McNary Dam, turbine Unit 1, June 15 – August 31, 2014 .....	21
Figure 18. Temperature differentials between gatewell & collection channel at McNary Dam, turbine Unit 8, June 15 – August 31, 2014 .....	21
Figure 19. Temperature differentials between gatewell & collection channel at McNary Dam, turbine Unit 12, June 15 – August 31, 2014 .....	21
Figure 20. Temperature differentials between collection channel & separator at McNary Dam, June 15 - August 31, 2014 .....	22
Figure 21. Separator temperatures vs. raceway 9W temperatures at McNary Juvenile Fish Facility, June 15 - August 31, 2014 .....	23
Figure 22. Collection Channel at Unit 1 and Navigation Wingwall Differential at McNary Dam, June 21 – August 31, 2014.....	23

### List of Tables

Table 1. Monthly air temperatures (°F) & wind velocity (mph) at McNary Dam, 2010 – 2014. 10	
Table 2. Monthly Forebay water temperature averages at McNary Dam, 2010 - 2014 .....	13
Table 3. Collection Channel water temperatures at McNary Dam, 2010 - 2014.....	18
Table 4. McNary Juvenile Fish Facility Average laboratory water temperatures, June 15 - August 31, 2009 - 2014.....	24
Table 5. McNary Dam collection, mortality, and passage of fall Chinook, June 15 – August 31, 2010 – 2014 <sup>1</sup> .....	25
Table 6. McNary Dam Collection Fall Chinook, June 15 – August 31, 2010 - 2014 .....	26

### ACKNOWLEDGMENTS

This report was accomplished only with aid from the McNary staff. Thomas VanNice and the PSMFC crew always do a great job of helping out with the technical issues of preparing, downloading probes and compiling data. Bobby Johnson and the Corp of Engineers crew at the Juvenile Fish Facility were always available for anything that was needed.

## INTRODUCTION

McNary Dam, located at river mile 292 of the Columbia River, is the first hydroelectric project downstream of the confluence of the Snake and Columbia Rivers. McNary Dam is 7,365 feet long, and rises approximately 183 feet above the streambed. It consists of a 14 turbine Unit powerhouse, a 22 bay spillway, a navigation lock, and an earthen fill embankment at the Oregon (south) abutment. The dam raises the water surface approximately 85 feet creating Lake Wallula, which extends 64 miles upstream to the Hanford Reach on the Columbia River and to Ice Harbor Dam on the Snake River. Lake Wallula has a water surface area of 38,800 acres with 242 miles of shoreline.

The McNary powerhouse is equipped with extended-length submersible bar screens (ESBS) to guide fish into the gatewells of each turbine Unit. There are three vertical gatewell slots (A, B, and C) for each turbine Unit. From the gatewells, water and fish enter the collection channel through 12-inch orifices that leads to a wet separator at the juvenile fish facility (JFF) for separation of fish by size and return of adults to the river. The juvenile fish can be routed back to the river or held in raceways for transport by barge or truck to release locations below Bonneville Dam.

Since 1987, Washington Department of Fish & Wildlife (WDFW/PSMFC) has recorded water temperatures across the powerhouse from June 15 through August 31 of each year. This work has been conducted to identify thermal gradients at the McNary Project that might be detrimental to juvenile fish entering the project and fish facility. Water temperatures were recorded from the scrollcase of all 14 turbine Units. Prior to 1998, water temperatures were recorded with a dissolved oxygen meter in the B gatewell slot of each turbine Unit, and the forebay surface at odd numbered turbine Units at 1:00 p.m. each day. Since 1998, temperature monitoring efforts have been expanded over the full 24 hours of each day to recover temperature information using electronic temperature probes. In 2014, all 36 probes were MadgeTech Temp1000®.

### *Objectives*

The specific objectives at McNary Dam for 2014 were to:

- 1) Monitor typical temperature patterns in the forebay, tailrace, collection channel, and juvenile fish facility of McNary Dam.
- 2) Monitor the effects of forebay temperatures on turbine Unit gatewell water temperatures.
- 3) Monitor the effects of wind speed and air temperature on water temperatures and the creation of thermal gradients at the McNary Dam.
- 4) Locate areas where thermal gradients are present at McNary Dam and within the juvenile fish facility.
- 5) Monitor water temperatures in the raceways and the separator.
- 6) Monitor increased temperature gradients at McNary Dam that might pose a threat to increased mortality at the JFF.


## ***Methods***

MadgeTech Temp1000<sup>®</sup> temperature data loggers were installed at 36 locations throughout the McNary Project and Juvenile Fish Facility (JFF). It is accurate to +/- 0.5°C at any temperature. The range is -40 ~ +80°C. Probes located at the Project and JFF were set to record temperatures at 30-minute intervals.

Temperature probes were downloaded each day for in-season evaluation of thermal gradients at the Project. A weather station is located on top of the JFF building to record air temperatures and wind speed. The weather station recorded temperatures on 30-minute intervals to correspond to water temperature information. Weather information was downloaded every day. All data presented in this report, unless stated otherwise, was from June 15 through August 31, 2014.

MadgeTech Temp1000<sup>®</sup> data recorders were positioned in the following locations at McNary Dam in 2014 (Figure 1):

- 1) In front of spillbay 22, 17, 12, 7 and 2 approximately 5 feet below the surface. These probes were hung in the center of the spillbay, on the tailrace side.
- 2) Forebay, near elevation 335 approximately 5 feet below the surface. These are attached to the pier noses of the “B” slot in front of turbine Units 1, 3, 5, 7, 8, 10, 12 and 14.
- 3) Attached to the handrail in the center of the “B” turbine gateway slots, approximately 2 to 3 feet below the surface, in turbine Units 1, through 14.
- 4) The collection channel had probes installed at turbine Units 12, 8 and past Unit 1 at the beginning of the transition screen.
- 5) Fish separator, between the bars nearest the side of the “B” side. It is impossible to float the canister and have it out of the way for the technicians to work. Therefore, it lays on the bottom.
- 6) Sample holding tank, side “B”, 2 feet below surface.
- 7) Recovery raceway #9W at a depth of 2 – 3 feet.
- 8) The barge transportation dock, 5 feet below the surface.
- 9) The wingwall of the navigation lock on the tailrace side of the dam. This was placed 5 feet below the water surface.
- 10) Tailwater locations were at turbine Unit 1 and 14 (tailrace). These were placed 5 feet below the water surface.

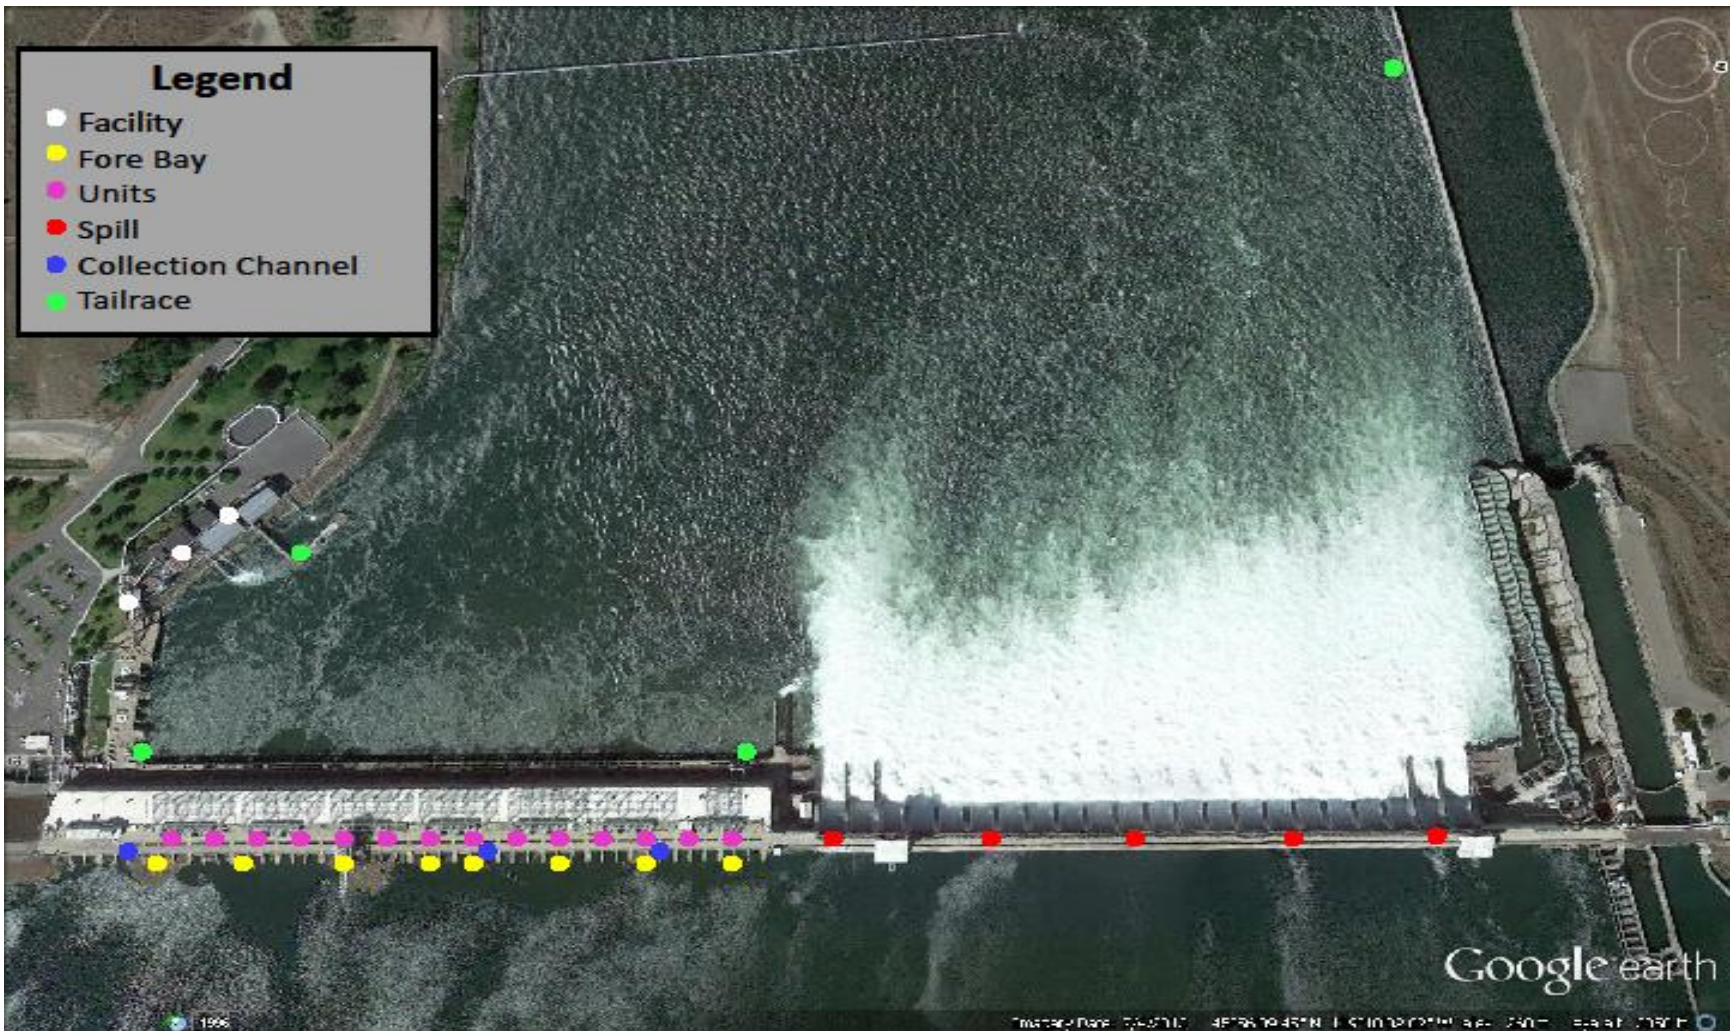


**Figure 1.** Placement of temperature data devices at McNary Dam, 2014\*

\*Picture was taken July 4, 2013

## WEATHER

Air temperature and wind velocity have been identified as critical components impacting thermal gradients at McNary Dam (Hoffarth 1999). Mild (3–5 mph) to moderate (6–10 mph) wind velocities help to break up major temperature differences that may appear between the forebay and the gatewell. When ambient air temperature exceeds 90 °F, thermal gradients may occur. Light winds (>3 mph), can break up these gradients (Figure 2).

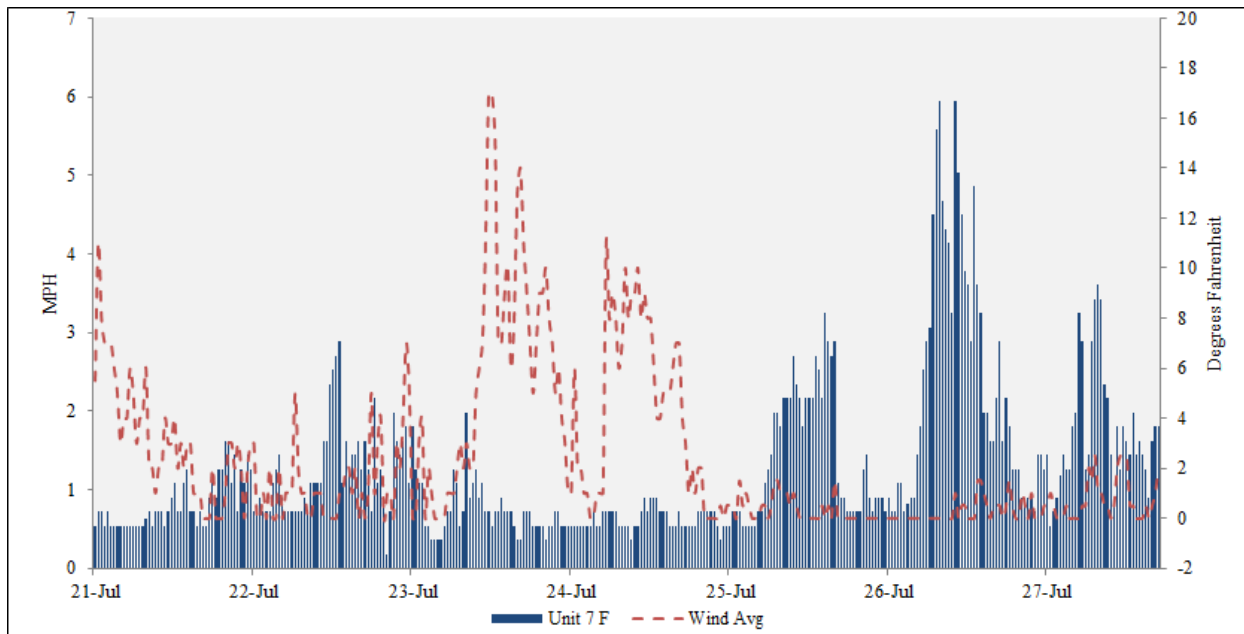


**Figure 2.** Differences in degrees Fahrenheit between forebay & gatewell, with wind, at McNary Dam, July 21 – 27, 2014

The 2014 season was the 16th year WDFW/PSMFC has recorded complete and accurate weather information at McNary Dam. The weather station was located at the JFF immediately below the powerhouse on the Oregon shore. There is one two-day gap in the data from 0730 hours, August 2 until 1030 hours August 4.

Mean daily air temperatures in June, July and August were 67.4, 78.2 and 75.4°F respectively. The highs were 89.0, 102.5 and 98.5°F (Table 1). July had 24 and August had 14 days of 90°F or greater for day time temperatures. Of those days, there were three in July had an accompanying 3mph breeze to break up thermal gradients.



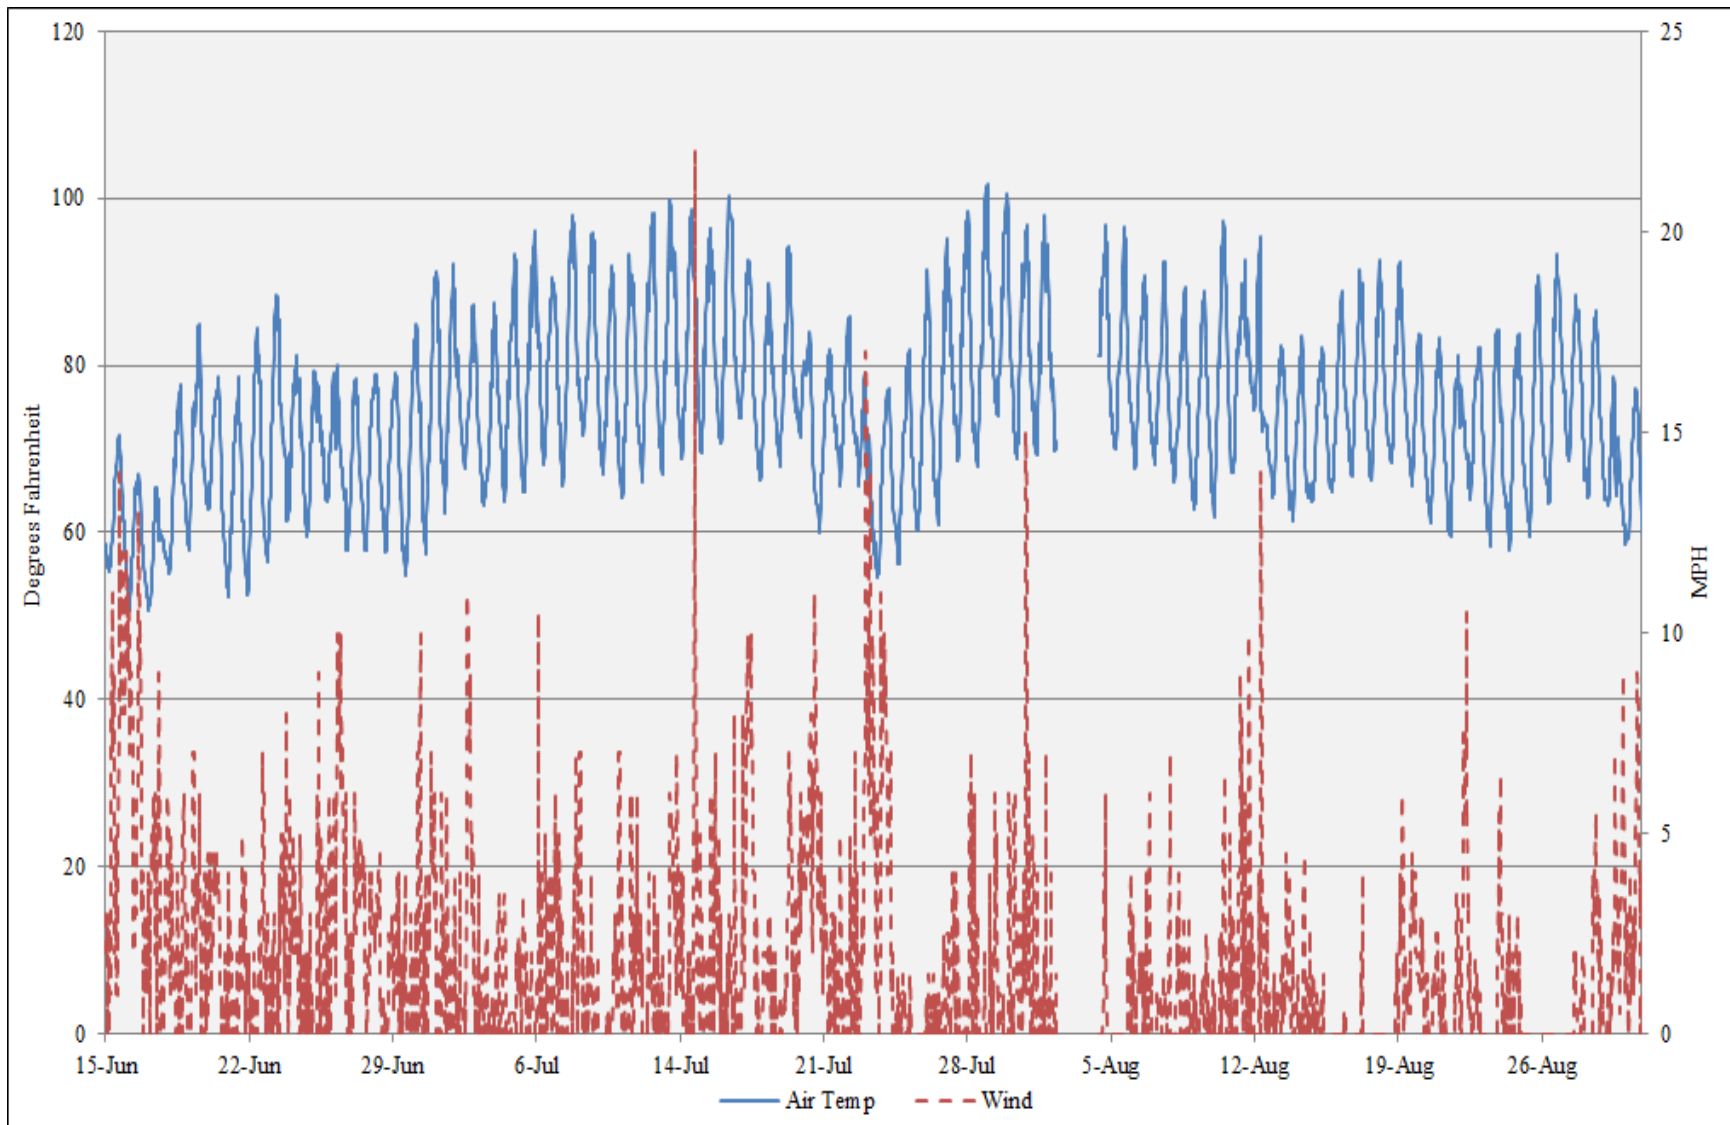

**Figure 3.** Air temperatures (°F) & wind velocity (mph) at McNary Dam, June 15 – August 31, 2014


**Table 1.** Monthly air temperatures (°F) & wind velocity (mph) at McNary Dam, 2010 – 2014

Month	Daily Average	Maximum Average	Minimum Average	Maximum Range	Minimum Range	Days >90°F	Wind Average
<b>June*</b>							
2014	67.4	79.4	56.3	65.8-89.0	50.5-63.5	0	3.3
2013	68.4	79.5	58.9	67.6-96.8	52.5-67.6	4	3.3
2012	66.4	78.2	55.6	70.3-88.6	49.1-64.3	0	4.1
2011	65.6	78.1	55.1	70.6-89.3	48.0-62.0	0	4.1
2010	66.5	78.8	56.2	65.2-90.5	47.6-61.8	1	2.9
<b>July</b>							
2014	78.2	92.8	65.2	77.6-102.5	54.7-73.2	24	2.4
2013	76.9	92.5	64.5	82.2-105.1	53.8-73.2	20	2.2
2012	73.6	88.4	61.7	72.1-98.7	49.5-69.6	12	2.9
2011	70.1	84.1	58.5	74.7-94.7	50.8-66.0	6	2.8
2010	74.0	88.4	61.1	73.5-102.5	50.8-70.9	15	2.0
<b>August</b>							
2014	75.4	88.6	64.9	77.2-98.5	57.6-78.5	14	1.5
2013	75.4	88.9	64.5	79.2-98.0	57.5-74.6	14	1.5
2012	74.5	90.1	61.6	77.6-103.6	49.1-72.1	18	2.2
2011	74.0	88.6	62.6	74.2-97.5	53.9-73.0	13	2.2
2010	72.9	85.9	61.1	68.4-100.4	51.5-72.3	11	1.7


\*Report period begins June 15

## PROJECT DISCHARGE & SPILL

Total project discharge during the temperature monitoring period (June 15 – August 31) averaged 206.7kcfs in 2014. In 2013, the flow averaged 198.5kcfs (Figure 4). The target flows set by National Marine Fisheries Service Biological Opinion states that during the spring (April 20 - June 30) will be 220 – 260kcfs. McNary flows for the period averaged 378.0kcfs. From June 15 to June 30, flows averaged 265.1kcfs. According to the Biological Opinion, ideal target flows for July 1 through August 31 should average 200kcfs. Flows for this period were 191.6kcfs. The average percentage of project discharge diverted through the spill in 2014 was 49.9%, compared to 50.1% in 2013 (Figure 5).

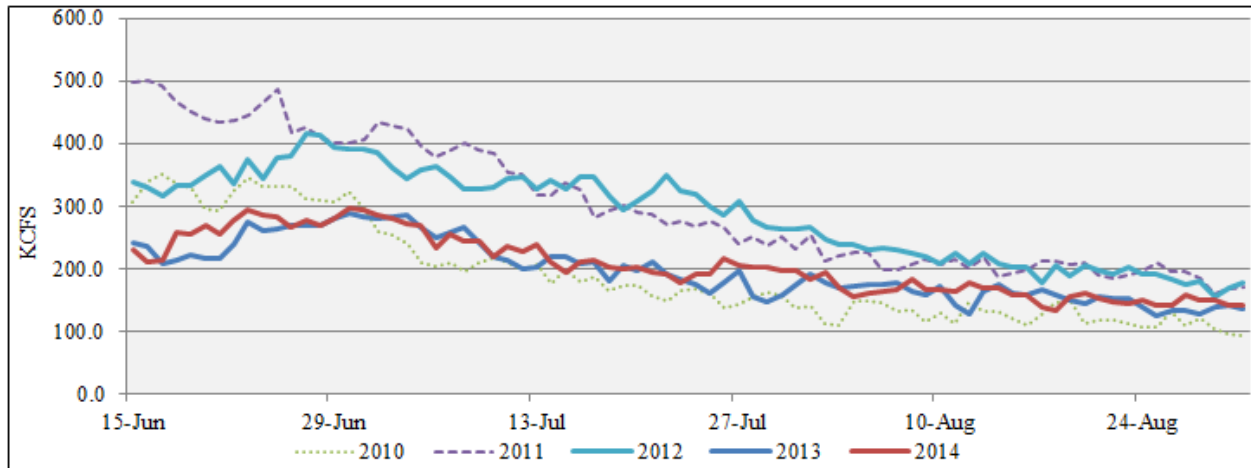

**Figure 4.** Project discharge for McNary Dam, 2010 - 2014

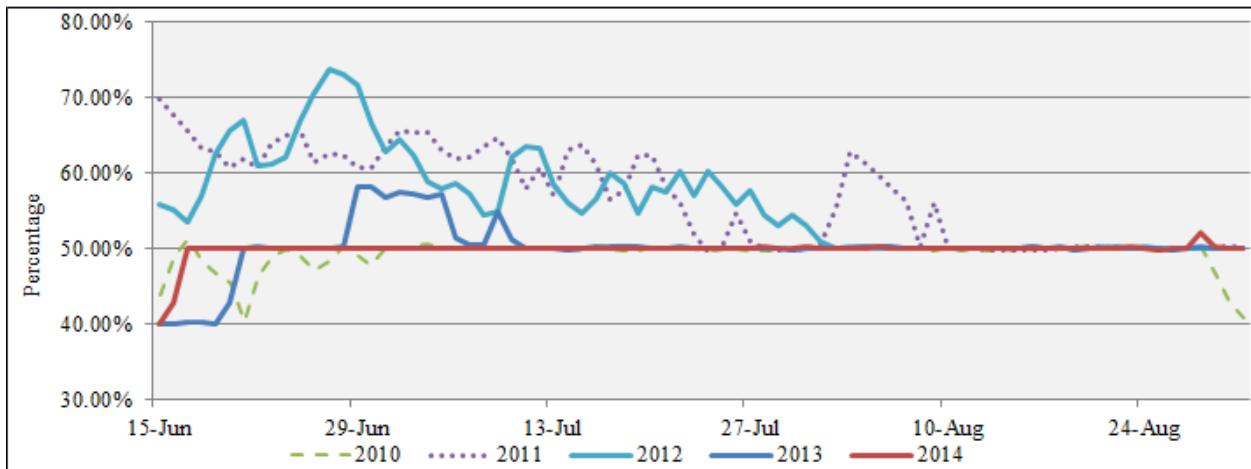


**Figure 5.** Percent spill at McNary Dam, 2010 – 2014

### Thermal Profiles at the Powerhouse

Forebay and gatewell water temperatures were recorded every half hour using MadgeTech Temp1000<sup>®</sup> temperature data loggers. This data was recorded in the “B” gatewell slot of all 14 turbine Units and the forebay surface water in front of turbine Units numbered 1, 3, 5, 7, 8, 10, 12 and 14. Temperatures are also recorded from the mercury thermometers on the scrollcase of each turbine Unit. Using this data, a daily cross sectional thermal profile of water temperatures at the powerhouse was constructed. This information was then used to identify thermal gradients at the project. The temperature profiles are relatively good indicators of thermal stratification. They also reveal the dynamics of water temperature movements at the powerhouse, peak daily temperatures and identify locations of critical thermal gradients. This data enables the generation of temperature profiles across the powerhouse during a full 24-hour period.


It has been shown in previous years that surface water temperatures in the forebay at McNary Dam increases during the day and peaks in the late afternoon or evening (Figure 6).

The trend for river water temperatures in the gatewells and in the forebay across the McNary powerhouse on warm days is cooler river water temperatures at the northern end of the powerhouse (turbine Unit 14) and warmer temperatures toward the southern end (turbine Unit 1). Turbine Unit operations influence temperature patterns as well.

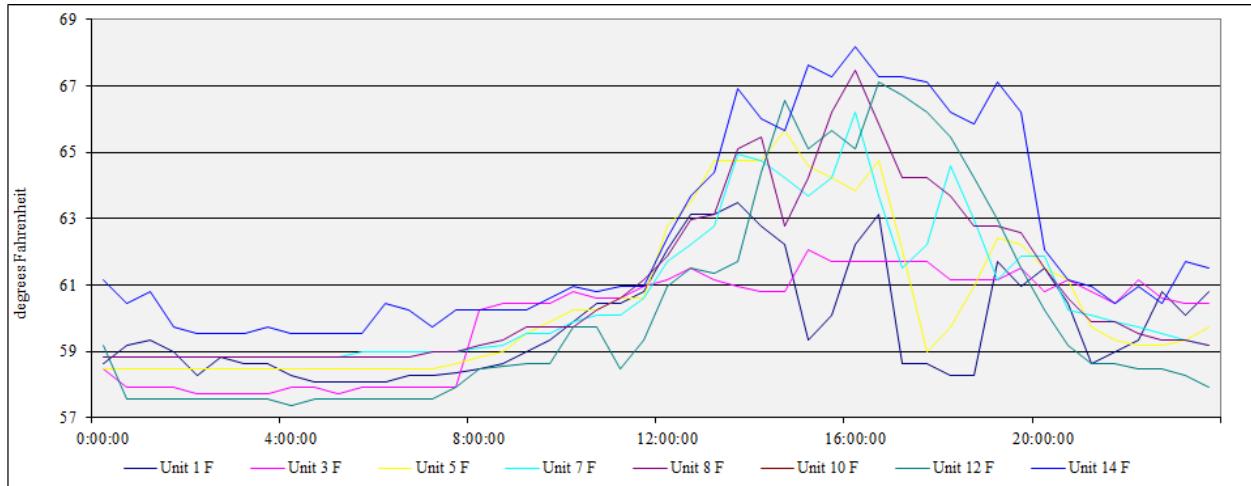

**Figure 6.** Forebay temperatures at McNary Dam, June 22, 2014

Figure 7 was made by taking the gatewell water temperature in the turbine unit and subtracting the gatewell water temperature of Unit 14 from it. This was done for every turbine starting with Unit 1 and continuing down through turbine Unit 13. The differences for five of the units are graphed below. A negative number indicates that gatewell water temperatures in turbine Unit 14 were warmer. It is possible to have the differences in a unit go from positive to negative in one day.

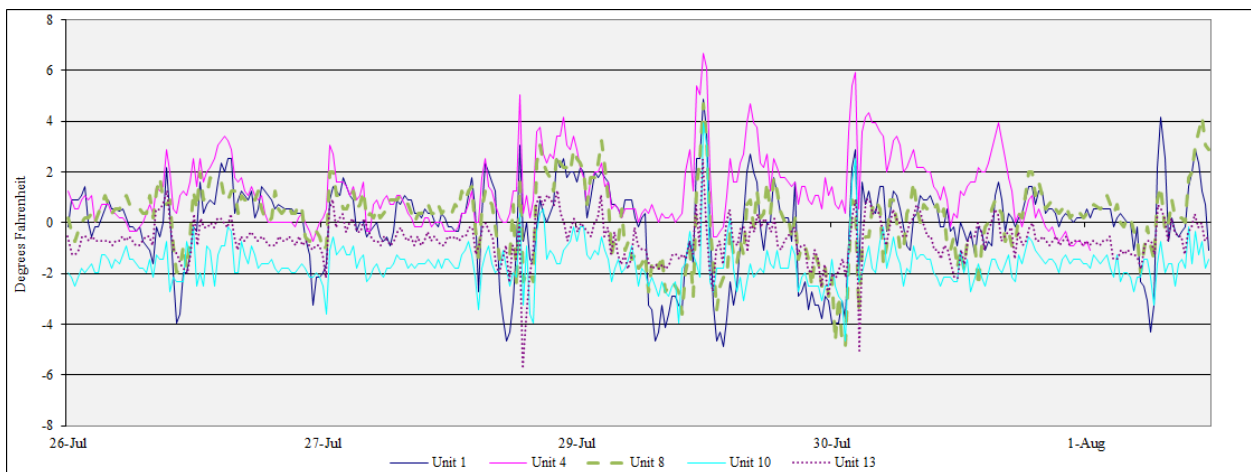

**Figure 7.** Temperature differences, in degrees Fahrenheit, in 5 gatewells across the McNary powerhouse, July 26 – August 1, 2014\*


\*Unit 4 was off.

*Forebay & Gatewell Temperature Profiles*

Temperatures were recorded every half hour in the forebay at powerhouse turbine Units 1, 3, 5, 7, 8, 10, 12, 14, and spillbays 22, 17, 12, 7, and 2 during 2013. Temperature probes were located at elevation 335, up to five feet below the surface. In the spillbays, the probes were deployed on the leafgate side between the gate and the side of the roadway. Gatewell probes were located in the center of the “B” slot of each turbine Unit, approximately three feet down. They also recorded temperatures every half hour. Average forebay temperatures in 2014 were: June 60.2, July 66.9 and August 70.7°F (Table 2).


**Table 2.** Monthly Forebay water temperature averages at McNary Dam, 2010 - 2014

<b>Year</b>	<b>June</b>	<b>July</b>	<b>August</b>
<b>2014</b>	60.2	66.9	70.7
<b>2013</b>	61.6	68.9	71.7
<b>2012</b>	59.2	62.4	69.2
<b>2011</b>	58.2	63.3	69.3
<b>2010</b>	60.1	67.6	71.3

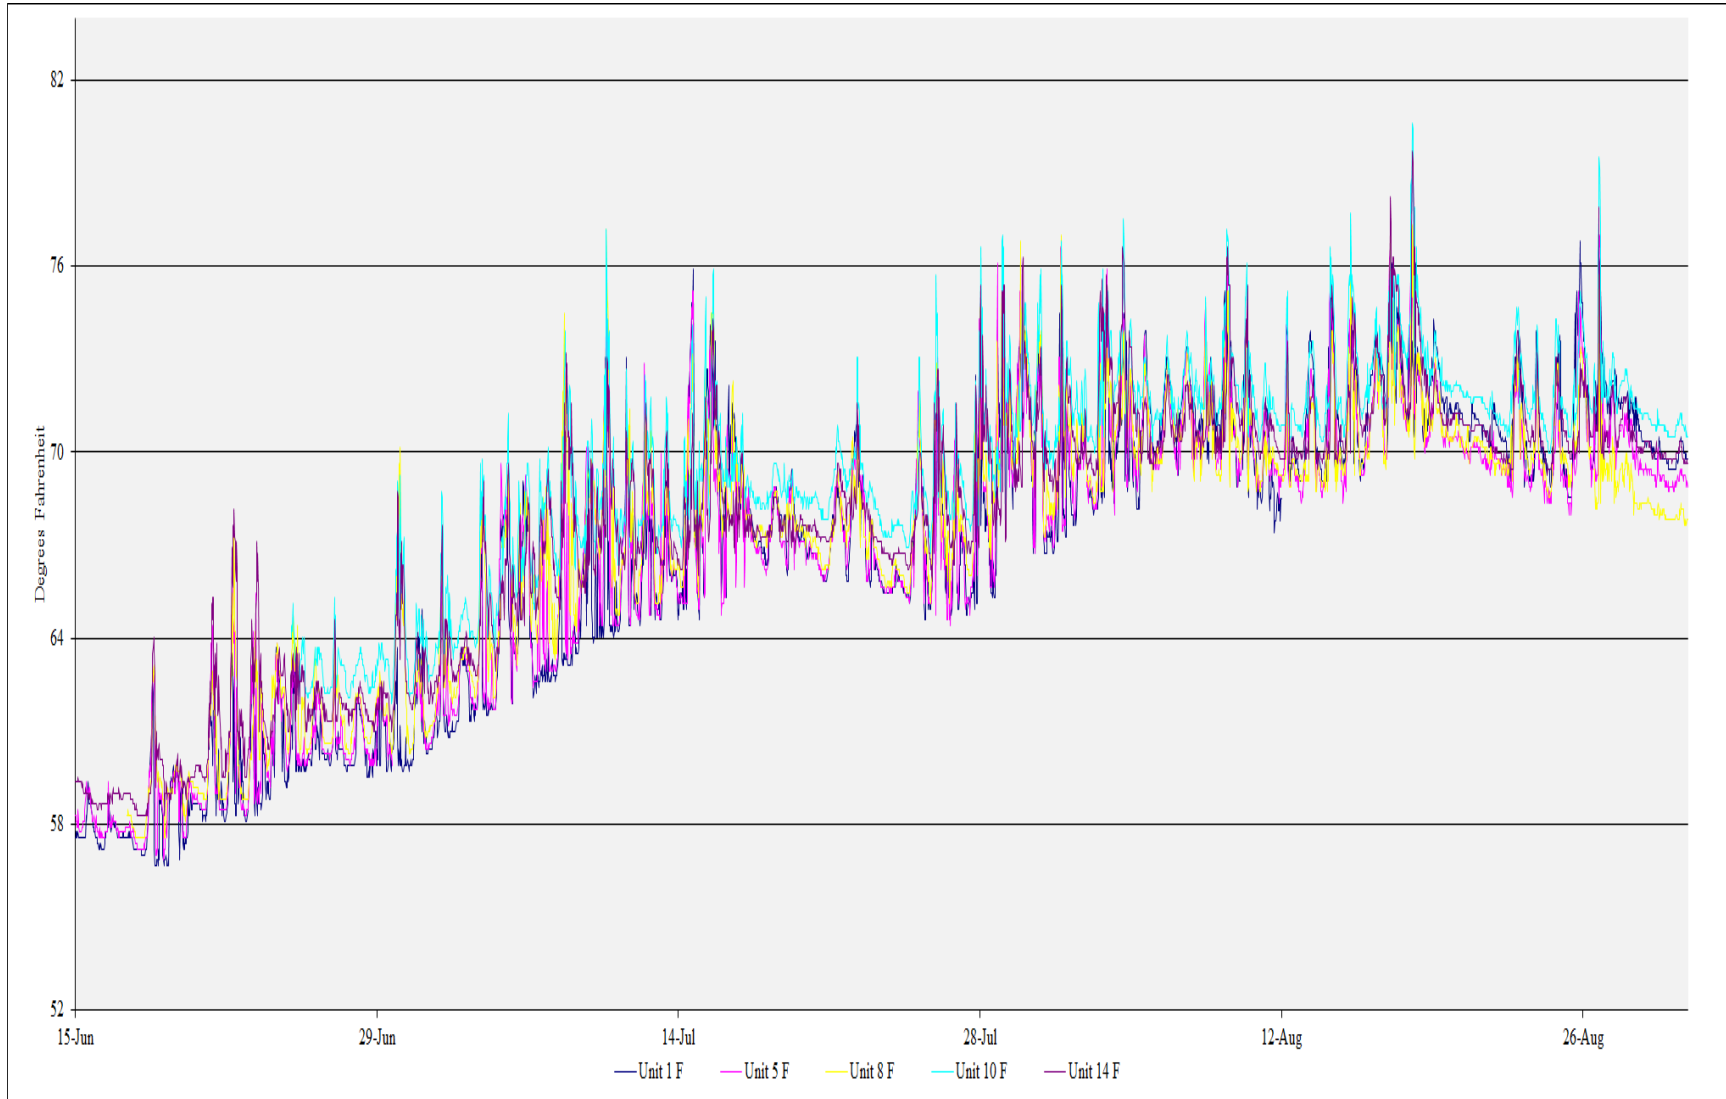


**Figure 8.** McNary Dam forebay temperatures in degrees Fahrenheit, June 15 – Aug. 31, 2014

The powerhouse turbines draw the warmer surface water from the forebay toward the fish screens and gatewell slots when in operation (Meyer 1989). Therefore, gatewell temperatures do follow the same trend as the corresponding forebay temperatures (Figure 9), climbing during the day and into the evening hours. Around midnight temperatures take a significant drop, cooling down during the morning hours. This is the coolest portion of the day, just before dawn (Figure 10)

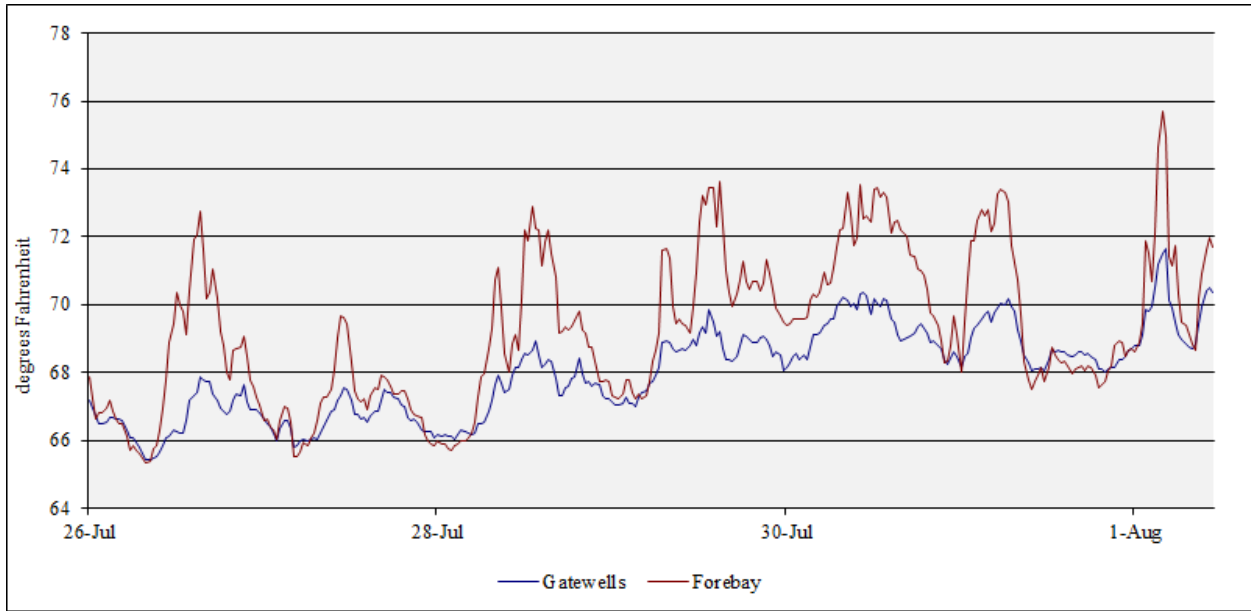

**Figure 9.** An average of temperatures across all 14 turbine Units at McNary Dam, July 26 - August 1, 2014

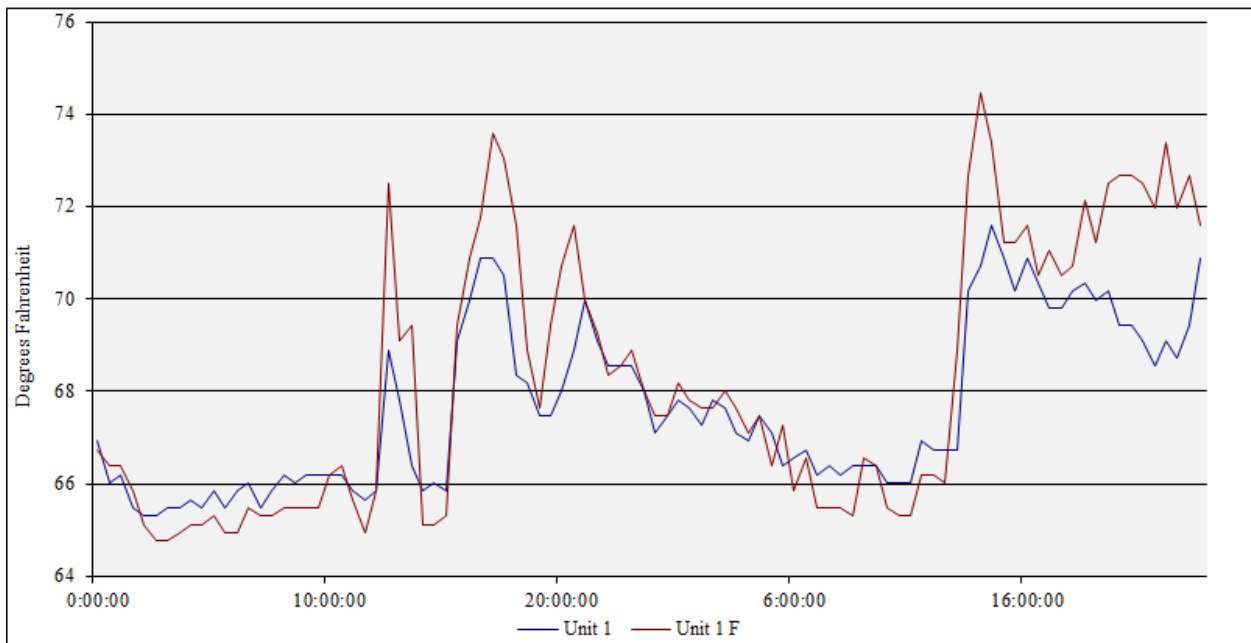


**Figure 10.** Forebay & Gatewell Temperatures at Unit 1 at McNary Dam, from July 28 - 29, 2014

### *Effects of Forebay Water Temperatures on Project Temperatures and Thermal Gradients*

Historically, water temperatures in the gatewells were similar to temperatures in the adjacent forebay, even though the gatewell temperatures typically did not elevate to the extremes recorded in the forebay (Figure 11). The high in the forebay was 80.6°F at 4:00pm on August 18 in front of turbine Unit 10. The high in the gatewell was 75.6°F in turbine Unit 14 also on August 18 at 5:00pm. With the onset of warming weather, there can be large water temperature gradients between the forebay and the gatewell. The gradients that are 8, 10, 12°F between forebay and gatewell are the significant factor that stress fish, and can cause mortality. The largest gradient was 8.6°F between Unit 8 and the forebay in front of this unit. This occurred June 30 at 5:00 p.m. Fish were not being held in the sampling tanks and there was no increase in mortality rate in the following days. In 2013 the high in the forebay was 81.5°F and the high in the gatewells was 77.0°F.




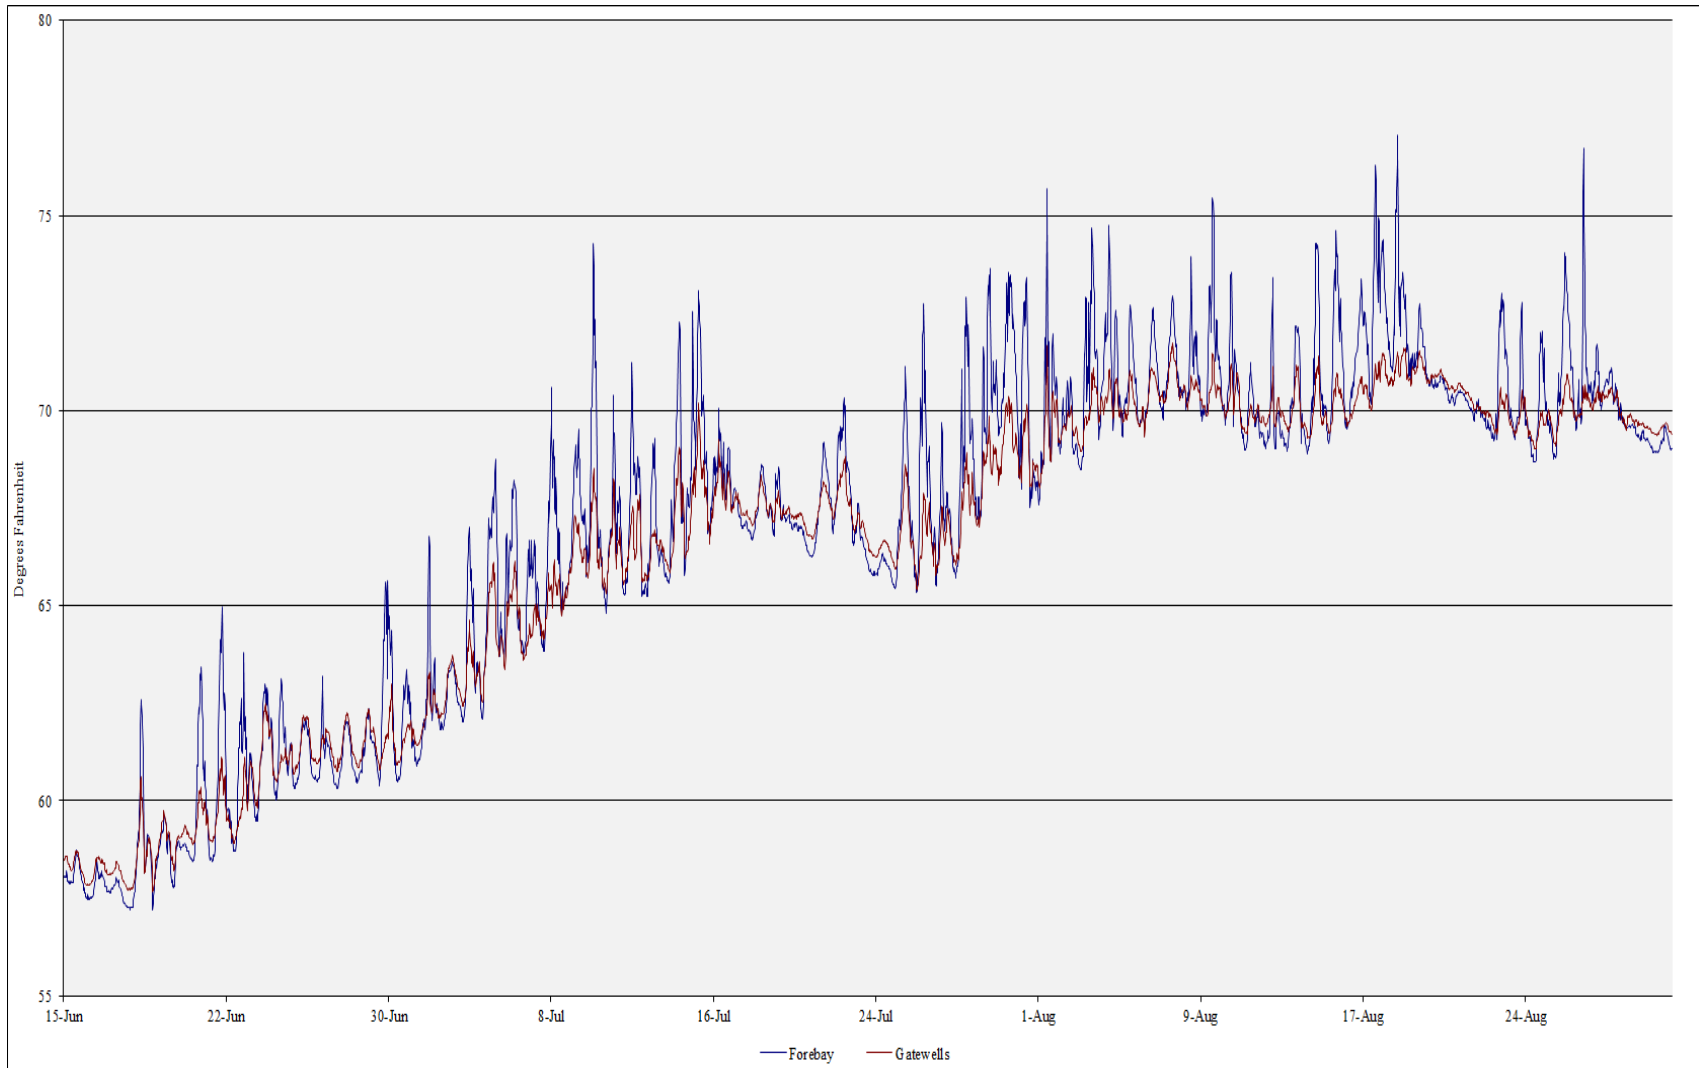

**Figure 11.** Average Gatewell & Forebay temperatures at McNary Dam, June 15 – August 31, 2014

### Collection Channel

Each turbine unit has three gatewells (A, B, and C) and each gatewell has a north and south orifice which discharge into the collection channel. In order to not overflow the collection channel, only one orifice is open per gatewell. Temperature probes are installed at three locations in the collection channel, downstream of turbine gatewell orifice marked 12B south, 8B south and upstream of the incline dewatering screen, Unit 1 (Figure 12).

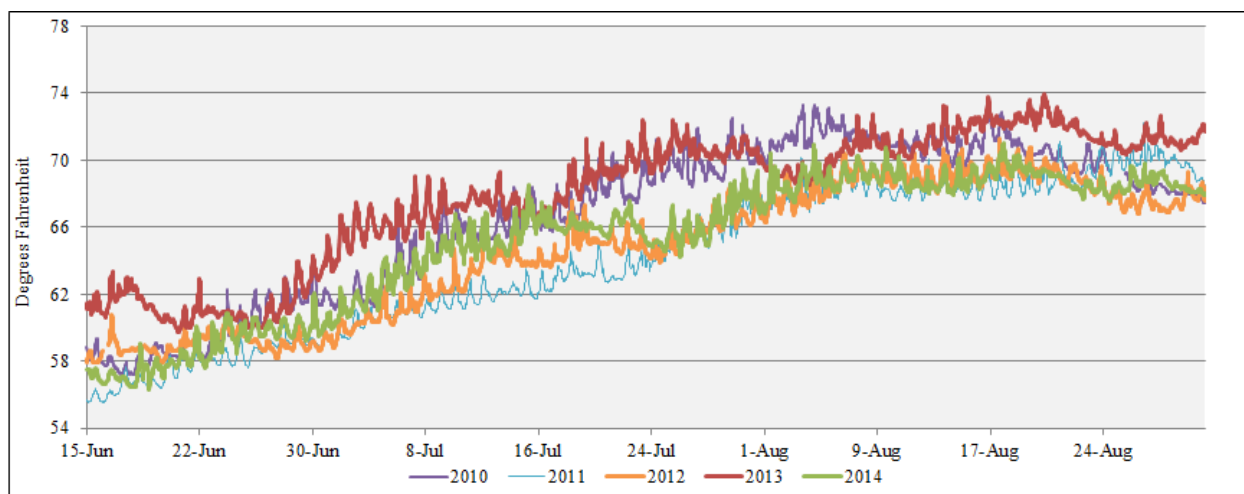


**Figure 12.** Average collection channel temperatures at McNary Dam, 2010- 2014

Water temperatures averaged 65.5°F in the collection channel from June 15 through August 31, compared to 68.0 in 2013. Collection channel water temperature did not reach 70°F until July 29\*. The warmest temperature recorded this season was 73.2°F. It was recorded on August 17 from 9:00 until 11:00pm below turbine Unit 12 (Figure 13).

**Table 3.** Collection Channel water temperatures at McNary Dam, 2010 - 2014


<b>Year</b>	<b>Average</b>	<b>High</b>	<b>Date</b>
<b>2014</b>	65.5	73.2	17-Aug
<b>2013</b>	68.0	75.0	20-Aug
<b>2012</b>	64.8	71.8	17-Aug
<b>2011</b>	64.1	72.7	27-Aug
<b>2010</b>	66.6	74.1	4 & 16-Aug

\* This is different than what was reported in the weekly reports. It was determined that the “new” probe was not calibrated correctly.

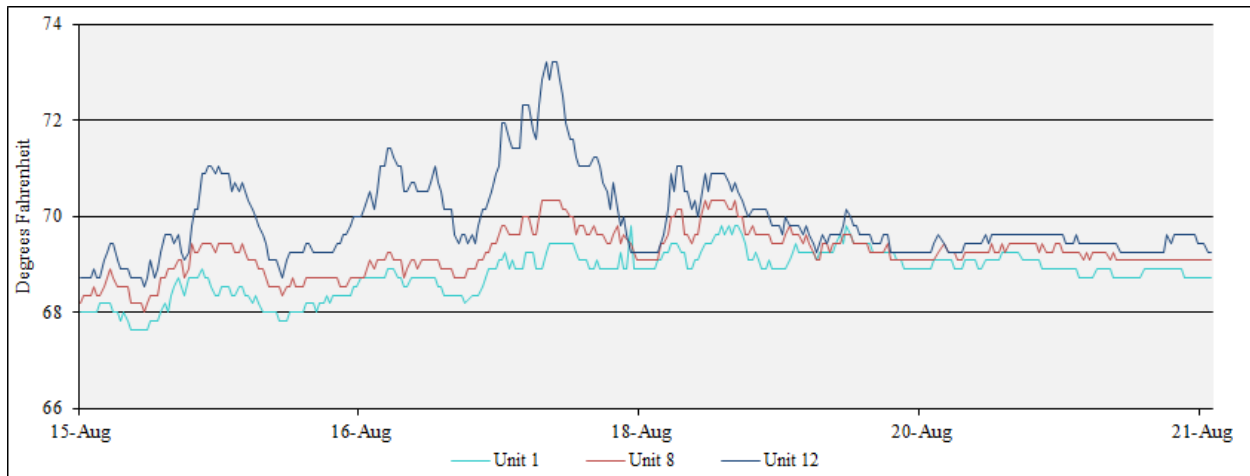


**Figure 13.** McNary Dam collection channel temperatures, August 15 - 21, 2014

Temperature gradients between turbine Unit 1 and turbine Unit 12 within the collection channel averaged  $-0.8^{\circ}\text{F}$  (range 2.6 to  $-4.0$ ) during the monitoring period (Figure 14). A negative number indicates that turbine Unit 12 was warmer. Temperature differences in the collection channel between Unit 12 on the northern end and Unit 1 on the southern end exceeded  $2.0^{\circ}\text{F}$  on 30 days. Of those days, 5 had hours where the temperature exceeded  $3.0^{\circ}\text{F}$ . The maximum temperature gradient recorded between turbine Unit 1 and 12, was  $-4.0^{\circ}\text{F}$  on August 17, from 8:00pm until 9:00pm, where Unit 12 was warmer than Unit 1. The differences in water temperatures between turbine Unit 1 and Unit 12 can be compared to last year (Figure 15).

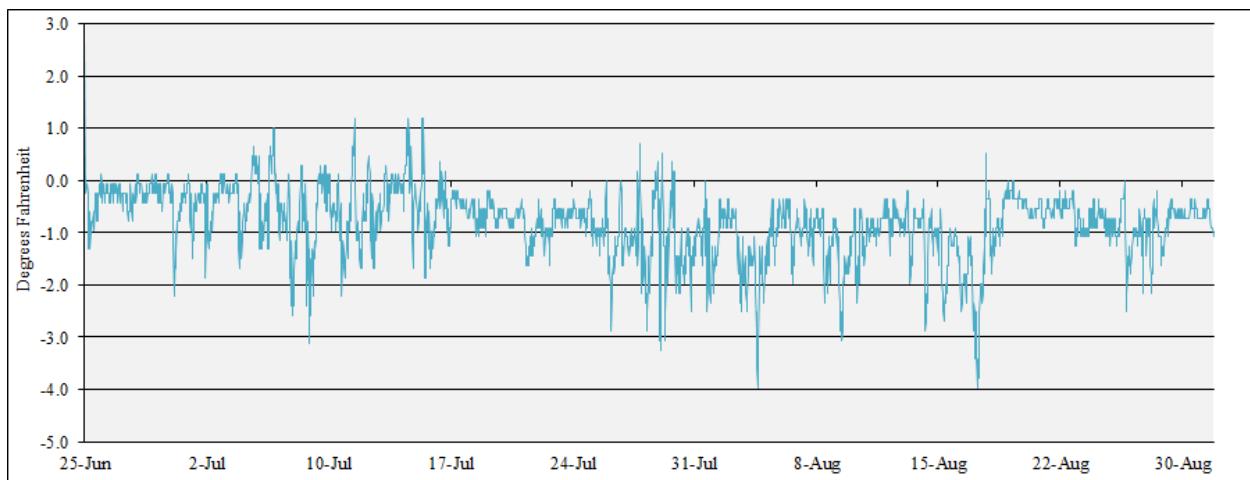


**Figure 14.** Differences in temperatures between Unit 1 and Unit 12 in the collection channel at McNary Dam, June 25 – August 31, 2014

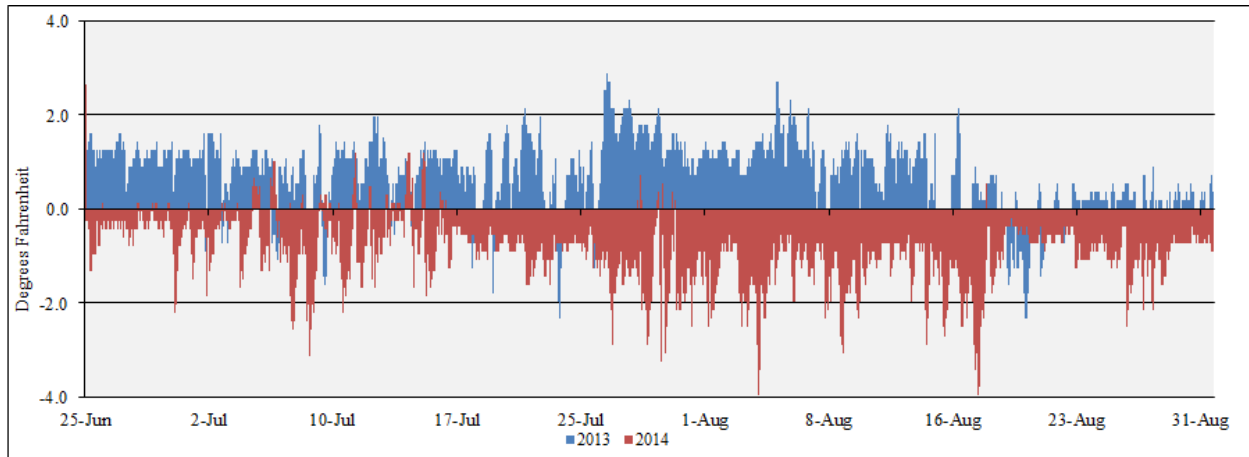


**Figure 15.** Differences in temperatures between Unit 1 and Unit 12 in the collection channel at McNary Dam, 2013 vs. 2014

*Temperature Gradients at the Orifice Discharge*


Previous temperature profiling identified water temperature gradients between the turbine unit gatewells and the collection channel (Hoffarth 1999). Water temperatures in the gatewells vary depending on turbine unit location, operation and weather. As previously described, temperature probes were placed at three locations in the collection channel. The water temperature within the collection channel at any one point reflects the mixture of water drawn in from the upstream gatewell orifices. Thermal gradients developed frequently when air temperatures exceeded 90°F. This was especially true when there was no wind and one or more turbine units were operating. Water temperatures in the gatewells and collection channel at the northern end of the powerhouse were usually similar (Figure 16). At Unit 1 the gradients ranged from 1.4 to a negative 5.9°F (Figure 17). A negative number would indicate that the gatewell was warmer. The gradients between the gatewell and collection channel at Turbine Unit 8 ranged from 2.5 to -4.5°F (Figure 18). At Unit 12, gradients were from -0.4 to -6.6 (Figure 19).

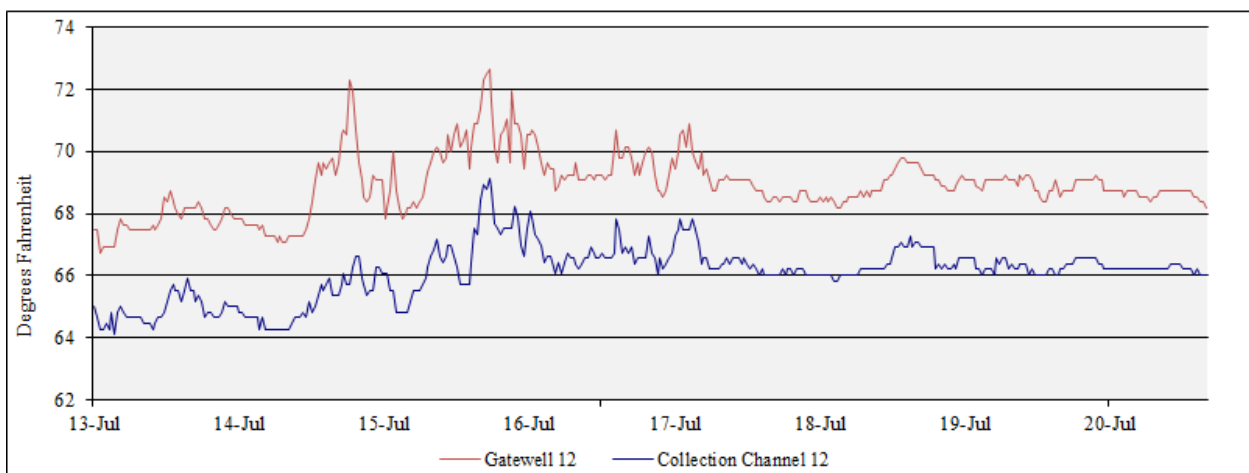


**Figure 16.** McNary Dam gatewell & collection channel temperatures at turbine Unit 12, July 13 – 20, 2014

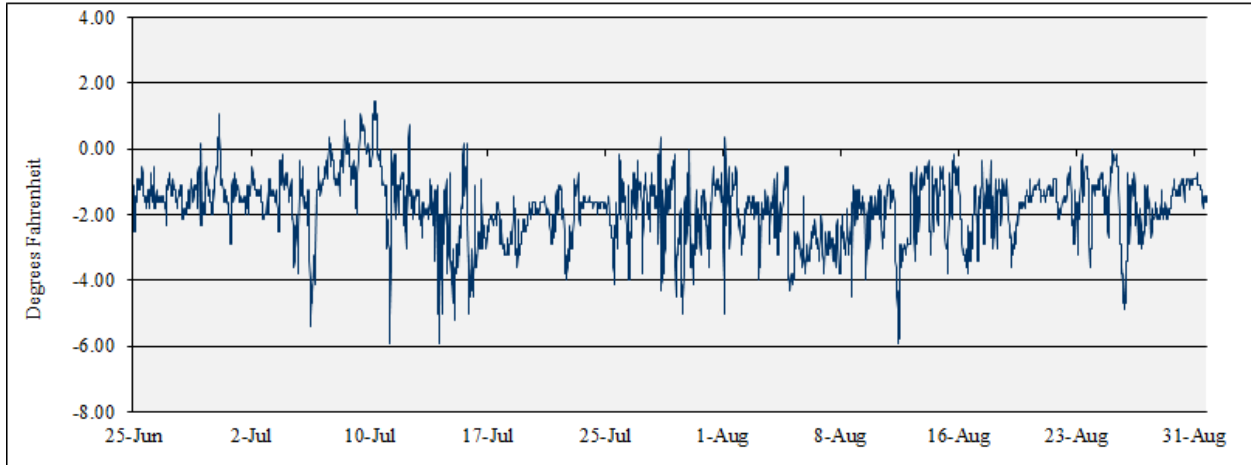

**Figure 17.** Temperature differentials between gatewell & collection channel at McNary Dam, turbine Unit 1, June 15 – August 31, 2014

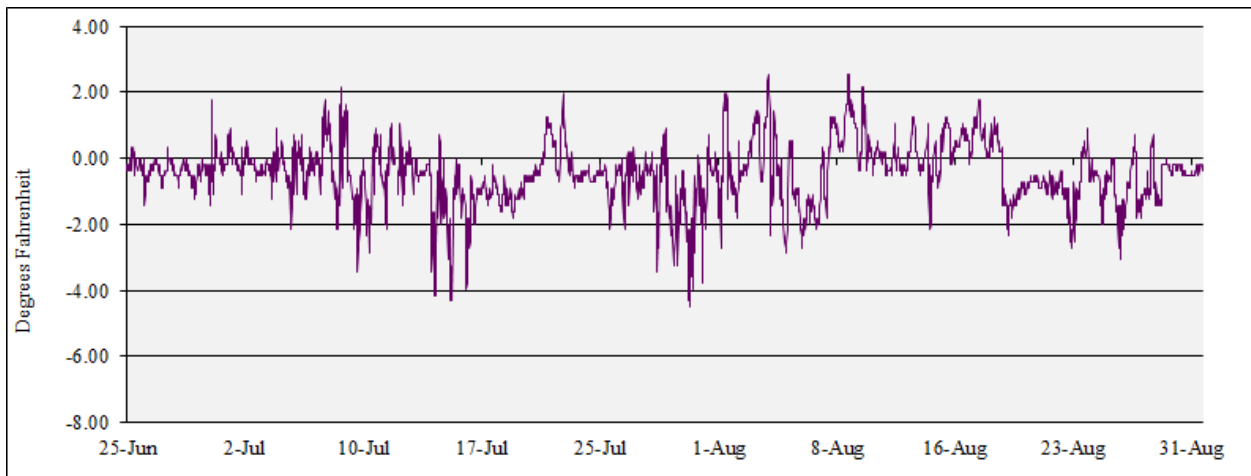

**Figure 18.** Temperature differentials between gatewell & collection channel at McNary Dam, turbine Unit 8, June 15 – August 31, 2014

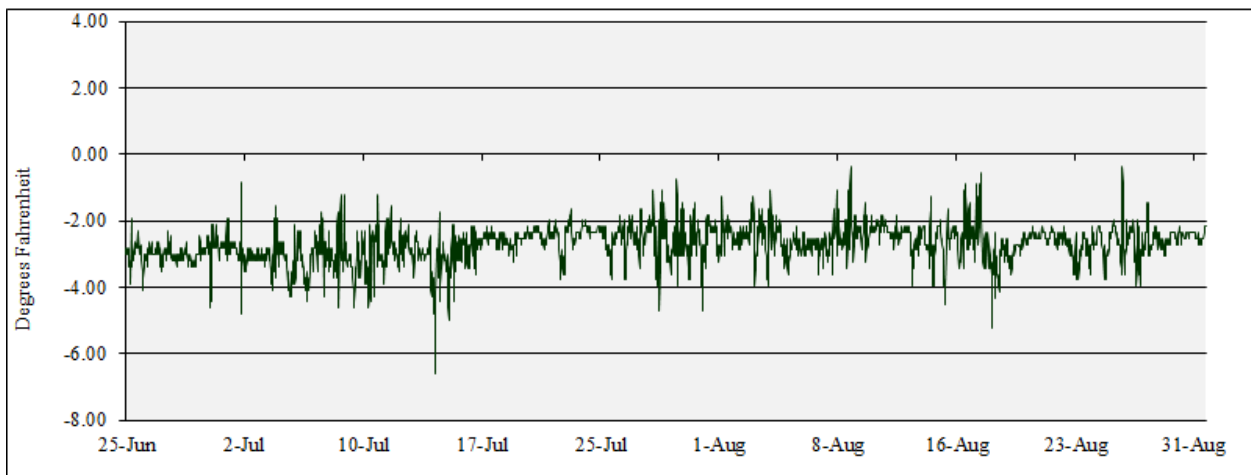


**Figure 19.** Temperature differentials between gatewell & collection channel at McNary Dam, turbine Unit 12, June 15 – August 31, 2014

## Juvenile Fish Facility

The McNary Juvenile Fish Facility (JFF) had temperature loggers installed in the separator, the sample holding tank “B” and recovery raceway 9W to monitor the water temperature that would directly affect fish that are being held for sampling. Water for the JFF comes directly from the collection channel. The temperatures that these probes record can be compared to the temperatures recorded from the probes located in the collection channel at the beginning of the inclined dewatering screen which is directly down from Unit 1.

### *Collection Channel vs. Separator*


The dewatering structure at the wet separator of the McNary JFF eliminates most of the water from the 36-inch transport pipe allowing only the fish and a small amount of water to reach the separator. Water in the separator is maintained by a series of upwells supplied by water from the collection channel. Temperature differentials between the collection channel and the separator ranged from 0.5 to 1.8°F (Figure 20). All of these numbers were above zero which indicates that the collection channel was cooler than the separator.

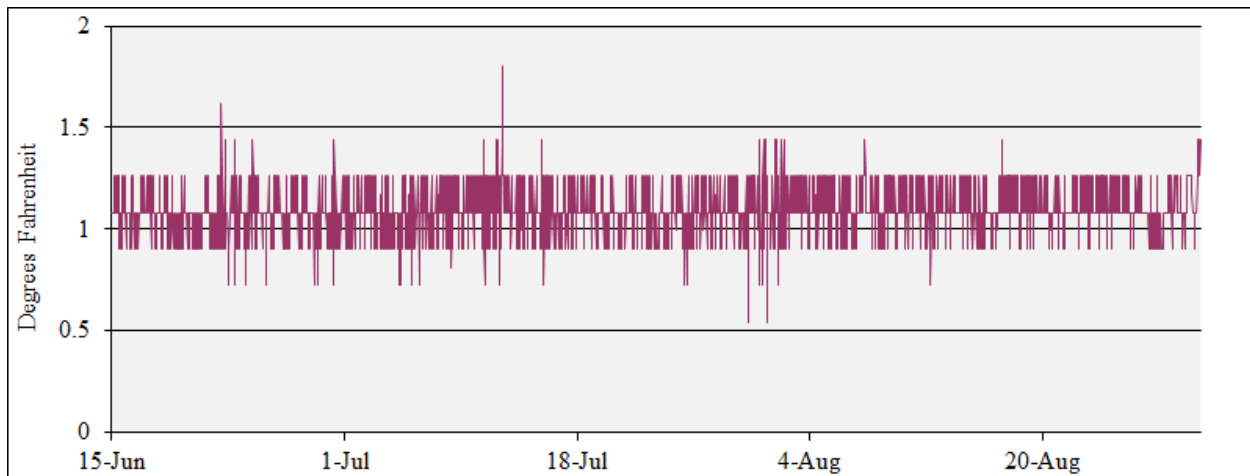

**Figure 20.** Temperature differentials between collection channel & separator at McNary Dam, June 15 - August 31, 2014

### *Separator vs. Raceway*


Excess water in the collection channel is removed by the inclined dewatering screen and a portion of it is used for operation of the JFF, providing inflow for the separator and holding raceways. Most of the raceways are covered, but those on the far west side are exposed to direct sunlight especially during the late afternoon. A temperature logger was located in the separator and in raceway 9W, the raceway where the sampled fish recover from anesthetics. The water exchange rate in a raceway with normal diffuser inflow was about 15 to 20 minutes. Temperature differential ranged from 0.0 to 4.0°F (Figure 21). The separator was consistently warmer than the raceway.

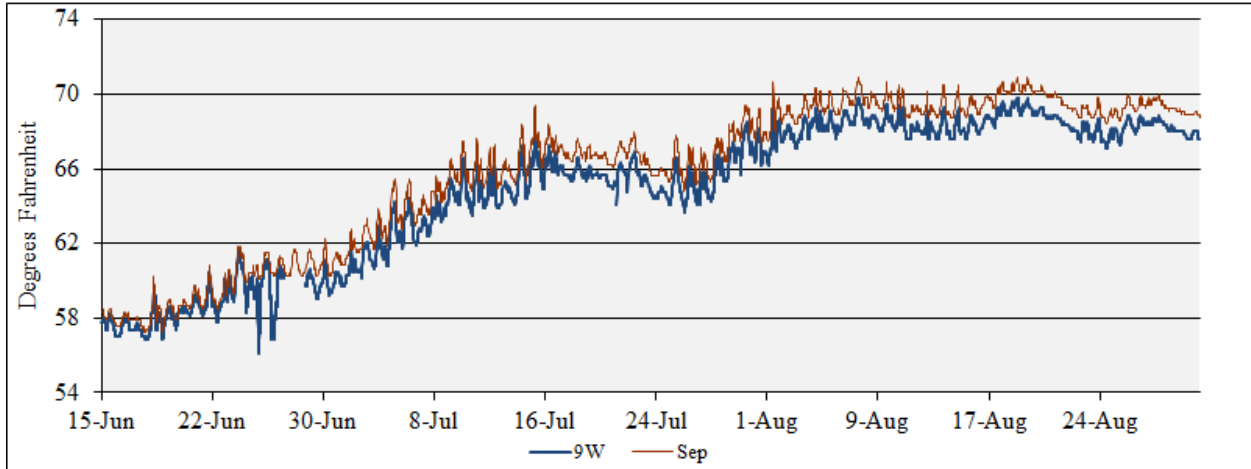

**Figure 21.** Separator temperatures vs. raceway 9W temperatures at McNary Juvenile Fish Facility, June 15 - August 31, 2014

*Tailrace*

Temperature loggers were installed in the tailrace below the project at four locations: the barge loading dock, below turbine Unit 1 and 14 and at the wingwall downstream of spillbay 1. Tailrace temperatures averaged 67.3°F, with a peak temperature of 72.3°F on August 20 from 7:00pm until 8:00pm, at the wingwall, directly across from the outfall pipe. With the advent of a new primary bypass pipe, fish no longer exit directly in front of the turbine units. They now exit the flume just above the boat restricted zone line. A comparison of the water temperature at the end of the collection channel and the navigation lock wingwall in the tailrace shows a differential range from 2.5°F to -2.5°F. A negative number indicates that the wingwall, tailrace, was warmer (Figure 22).

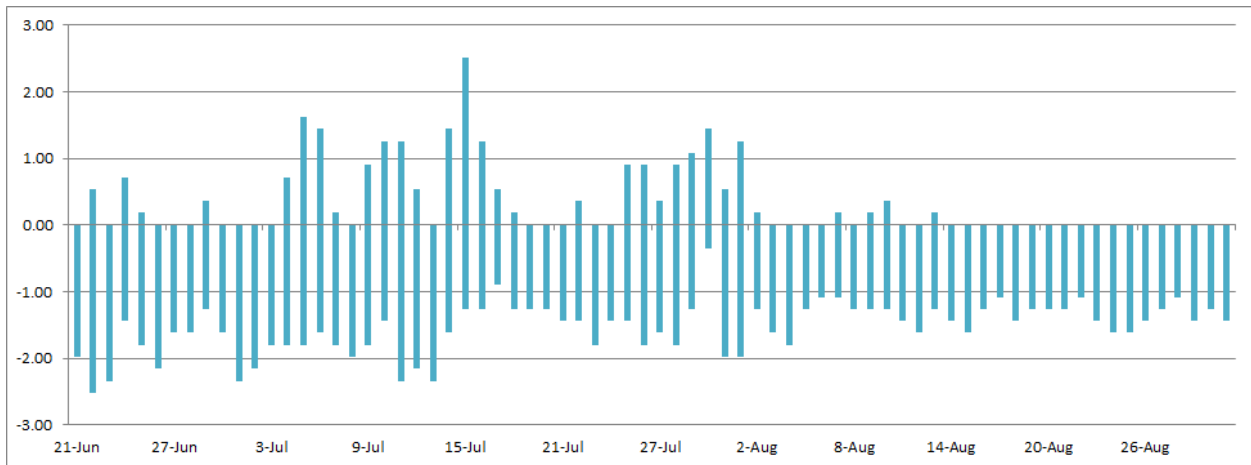

**Figure 22.** Collection Channel at Unit 1 and Navigation Wingwall Differential at McNary Dam, June 21 – August 31, 2014

## Holding for Transport

Juvenile salmonids are no longer being held in raceways for transport.

## River Temperature and Fish Passage Timing

Water temperatures are recorded at 7:00 am in the wet lab and reported to the Corps of Engineers on a daily basis. These temperatures reflect the temperature at the time of sampling in the fish sampling lab at the Juvenile Fish Facility (JFF). The water in the lab is fed from water removed by the inclined dewatering screen in the collection channel. Water temperatures at 7:00am are typically the coolest temperatures encountered at the JFF each day. Therefore, these water temperatures reported should be considered minimum temperatures. They do not provide information on daily maximum, minimum or fluctuations of water temperatures at the project. Water temperatures recorded in the wet lab during the temperature profiling season were warmer than the recorded averages (Table 4) with August being the warmest beyond the 5-year average.

**Table 4.** McNary Juvenile Fish Facility Average laboratory water temperatures, June 15 - August 31, 2009 - 2014

	2009	2010	2011	2012	2013	5-yr. Avg.	2014
<b>June</b>	61.6	58.7	57.1	58.3	61.0	59.3	60.4
<b>July</b>	67.9	65.4	61.9	62.9	67.4	65.1	66.7
<b>August</b>	70.4	69.8	67.7	67.8	70.6	69.2	70.8

Migration of juvenile fall Chinook, particularly wild fall Chinook from the Hanford Reach to McNary Dam is strongly tied to temperature. During cooler water years fall Chinook rear for a longer period and migrate later. During warm water years, the fish grow faster and begin the downstream migration sooner. Both of these scenarios typically have the same result; fish arrive at McNary during critical temperature periods.

Comparison of water temperatures and mortality rates for juvenile salmonids at the McNary fish facility from previous years suggests that temperature was related to mortality. Previously, years with warmer water temperatures corresponded to the highest mortality rates for subyearling fall Chinook at the McNary JFF. Lower mortality was often associated with cooler water years. The critical migration period in regards to thermal gradients occurs from mid-June to early August. At this time river temperatures at depth in the McNary forebay are in the tolerance zone for salmonids, 58°F - 66°F (Brett, 1952), but increased air temperatures elevate water temperatures at the surface during the afternoon creating thermal gradients in the forebay. Project operation, air temperature and wind combine to determine the movements and interactions of these cool and warm areas of water.

Fish passage timing can be critical to the mortality equation but earlier passage does not necessarily correspond to cooler river temperatures and decreased mortality (Table 5). The outmigration this year was effected by early hot weather conditions. This triggered an early outmigration of fall Chinook from the Hanford Reach. The forebay was consistently reaching



70°F by July 15, at which time the Corp of Engineers initiated a “sawtooth” pattern for operation of the powerhouse. This is an every-other-unit pattern which allows for a larger volume of cooler water to be drawn into the system. By July 8, 50% of these fish were at McNary. Without collection in the raceways for transport the volume of mortalities cannot be accounted for. Therefore, the only indicator of mortality is from the sample holding tanks. The largest day of mortality, 5.8%, was June 24. June 23, while fish were being collected, saw differentials between the forebay and gatewell as large as 6.3°F.

**Table 5.** McNary Dam collection, mortality, and passage of fall Chinook, June 15 – August 31, 2010 – 2014<sup>1</sup>

Year	Collection	System		Passage			
		Mortality	% Mortality	25%	50%	75%	90%
<b>2014</b>	2,306,928	661	<0.1	1-Jul	8-Jul	16-Jul	2-Aug
<b>2013<sup>2</sup></b>	1,616,623	538	<0.1	28-Jun	6-Jul	12-Jul	26-Jul
<b>2012</b>	1,238,437	1,156	<0.1	3-Jul	20-Jul	8-Aug	21-Aug
<b>2011</b>	2,173,108	40,776	1.9	12-Jul	24-Jul	31-Jul	11-Aug
<b>2010</b>	1,787,545	6,686	0.4	24-Jun	8-Jul	20-Jul	12-Aug

<sup>1</sup>These numbers are reflective of only the dates of this report, not the whole season.

<sup>2</sup>2013 is the first season without any transportation.

### *Fish Condition*

The migration of juvenile salmonids June 15 – August 31, through the McNary fish facility was dominated by subyearling fall Chinook (99.5%). The condition of fish prior to arrival at McNary may determine their ability to cope with the added stresses, thermal and physical, during passage through the fish collection system. Although the overall health of a fish cannot be determined as far as assessing disease and internal issues, external injuries and descaling can. The percentage of subyearling fall Chinook that were descaled by either concrete structures or predators during the 2013 temperature monitoring period was 1.7%. In 2013, it was 1.9%. In 2014, there were 3,012 subyearling Chinook examined between June 15 and August 31 for detailed injuries. Of those, 222 fish, 7.4%, had injuries, descaling, diseases or parasites. This season the most common injury was a general group called diseases. This could include anything from hemorrhaging to parasites.

### *Passage*

All fish guided into the McNary JFF are bypassed into the tailrace below the dam from the start of fish facility operation in the spring until October 1 when sampling is concluded (Fish Passage Plan, 2014). Collection and holding of fish in raceways for the juvenile fish transportation is no longer part of the agenda since the outfall pipe has been extended and moved.

A portion of the daily collection is diverted to the sample holding tanks for examination of fish condition and extrapolation of species passage through the project. Every-other-day sampling is the standard mode of operation. According to sampling guidelines, 300 – 500 fish

are to be sampled. The sample rate ranged from 0.0% to 10.0% from June 15 through August 31 in 2014. A total of 2,306,928 juvenile salmonids were collected during the temperature monitoring period (Table 6). Of those 2,294,411 were subyearling fall Chinook

**Table 6.** McNary Dam Collection Fall Chinook, June 15 – August 31, 2010 - 2014

	<b>Collection</b>	<b>Subyearling Chinook</b>	<b>Peak Collection</b>	<b>Date</b>
<b>2014</b>	2,306,928	2,294,411	265,064	2-Jul
<b>2013</b>	1,616,623	1,601,329	175,208	10-Jul
<b>2012</b>	1,238,437	1,229,268	89,405	20-Jul
<b>2011</b>	2,173,108	2,161,211	111,300	24-Jul
<b>2010</b>	1,787,545	1,767,622	195,570	26-Jun

*Mortality*

Sample tank mortality is the best indicator of mortality when in bypass mode. Sample tank mortality includes fish mortalities removed from the sample holding tank prior to sampling and mortality due to sampling activities. During bypass operation, mortality rates are only available from the daily sample as all other fish are returned directly to the tailrace. System mortality includes all mortalities recovered from the transport holding raceways, the sample and during bypass, the separator.

A total of 201 sampling mortalities were recovered from June 15 through August 31. This was 1.3% of the 14,950 fish sampled. The highest one-day sample tank mortality percentage was 5.8% on June 24.

## **Recommendations**

### *Powerhouse Operations*

Turbine unit loading should be kept as uniform as possible across the powerhouse. Computer modeling has shown that a “saw tooth” pattern of operations where every-other unit is on, is the best way to operate. This mode of operations allows for a larger volume of cooler water to be drawn into the system. “Saw tooth” pattern loading should be implemented on 15 June. This would be a preventative measure that could be taken in advance of hot weather. Starting and stopping of turbine Units during critical temperature periods should be conducted from 12:00 midnight to 12:00 noon, 4:00 a.m. to 10:00 a.m. being the most preferred times. Trashracks should be raked as often as possible

## Literature Cited

Brett, J. R. 1952. Temperature tolerance in young Pacific salmon, genus *Oncorhynchus*.  
Journal of Fisheries Research Board of Canada, 9: 265-323.

Hoffarth, Paul A. Thermal Gradients, Collection, and Mortality at the McNary Project. October  
2000. Joint study Washington Department of Fish & Wildlife with U.S. Army Corps of  
Engineers Walla Walla, Washington.

Meyer, Edward B. Evaluation of Data Collected on the Thermal Stress Problem for Juvenile  
Chinook Salmon at McNary Dam, Washington. CEWES-HS-R (1105-2-10b). June  
1989.

National Oceanographic and Atmospheric Administration (NOAA). 2014. Endangered Species  
Act – Section 7 (a) (2) Supplemental Biological Opinion. Northwest Region, Seattle,  
Washington.